

Notes

© 1997 Johnson Controls Inc.

Optional accessories

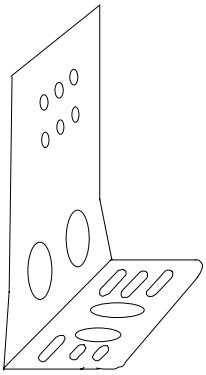

Fig. 10
Mounting bracket
Order number **271-51**



Fig. 11
Adjusting wrench
Order number **WRN12-1**

Specifications

Type number	See type number selection table		
Refrigerant	Non-corrosive, all range		
Alarm contact	Yes		
Safe light contact	Yes		
Operating range	0.5 to 4 bar		
Ambient temperature	-40 to +60 °C		
Maximum allowable overrun pressure	29 bar		
Material	case	1.5 mm cold-rolled steel, zinc plated	
	cover	0.8 mm cold-rolled steel, painted	
Enclosure	IP 30		
Electrical rating pilot circuit	~15(8)A 230 V		
Shipping weight	ind. pack	1.5 kg	
	overpack	16 kg (10 pieces)	
Accessories	Mounting bracket	order number	**271-51**
(order separately)	Adj. wrench	order number	**WRN12-1**
Dimensions	(see Dimension drawing)		

Time delay heater de-energised at 0.2 bar pressure difference above setting.
Note: 1 bar = 100 kPa ≈ 14.5 psi.

The performance specifications are nominal and conform to acceptable industry standards. For applications at conditions beyond these specifications, consult the local Johnson Controls office or representative. Johnson Controls shall not be liable for damages resulting from misapplication or misuse of its products.

JOHNSON CONTROLS

Johnson Controls International, Inc.
Headquarters: Milwaukee, WI, USA
European Headquarters: Westendhof 8, 45143 Essen, Germany
European Factories: Lomagna (Italy), Leeuwarden (The Netherlands) and Essen (Germany)
Branch Offices: Principal European Cities.
This document is subject to change

Printed in Europe

© 1997 Johnson Controls Inc.