


Product Code

**6220/6**

Diaphragm Valve  
3/4" ODS

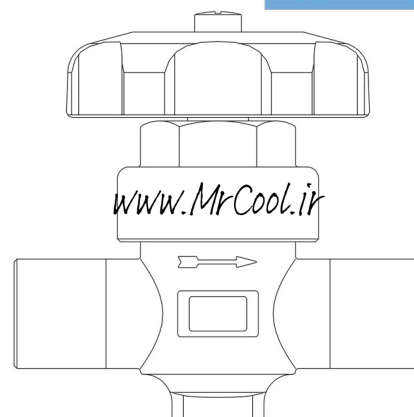

**CLASSIC**

### Impiego

Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1:

- HCFC (R22)
- HFC (R134a, R404A, R407C, R410A, or R507)
- HFO and HFO/HFC blends (R1234ze, R448A, R449A, R450A, R452A, R513A)

Maximum allowable pressure PS = 28 bar.

Allowable temperatures TS = -35 / +90 °C

### Dettagli prodotto

Connections SAE Flare -

Connections ODS Ø [in.] 3/4"

ODS Ø [mm] -

Kv[m<sup>3</sup>/h] 3,65

PS[bar] 28

TS[°C] Min -35

TS[°C] Max +90

Package pcs 14