


Product Code

6220/7

Diaphragm Valve
7/8" ODS

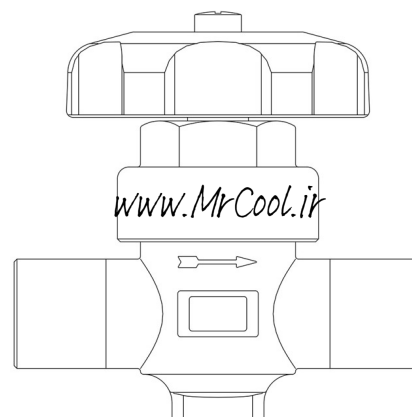

CLASSIC

Impiego

Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1:

- HCFC (R22)
- HFC (R134a, R404A, R407C, R410A, or R507)
- HFO and HFO/HFC blends (R1234ze, R448A, R449A, R450A, R452A, R513A)

Maximum allowable pressure PS = 28 bar.

Allowable temperatures TS = -35 / +90 °C

Dettagli prodotto

Connections SAE Flare	-
Connections ODS Ø [in.]	7/8"
ODS Ø [mm]	-
Kv[m ³ /h]	3,65
PS[bar]	28
TS[°C] Min	-35
TS[°C] Max	+90
Package pcs	14