

- Please name the model No. (PR-B6S) when negotiation.
- Thread: BS21, ANSI B2.1.
- Max. Temperature: 120°C
- Test Pressure: Body 15 kgf/cm<sup>2</sup> (Hydrostatic)
- Outlet Primary Pressure: 0.5 kgf/cm<sup>2</sup> - 5 kgf/cm<sup>2</sup>


**Material**

<b>Model</b>	<b>PR-B6S</b>
<b>Body</b>	ASTM B124 or B584
<b>Bonnet</b>	ASTM B124
<b>Piston</b>	ASTM B124
<b>Stem</b>	ASTM B16
<b>Seat</b>	ASTM B16
<b>Disc</b>	NBR
<b>Spring</b>	SWPA
<b>Spring Holder</b>	ASTM B16
<b>Bottom Cover</b>	ABS
<b>O-Ring</b>	NBR

**Dimension**

Size	mm						
	inch	1/2	3/4	1	1.1/4	1.1/2	2
	mm	15	20	25	32	40	50
<b>L</b>		60	62	90	95	95	95
<b>H</b>		110	110	152	165	165	165

# ST.ST.304 PRESSURE REDUCING VALVE CLASS 10K

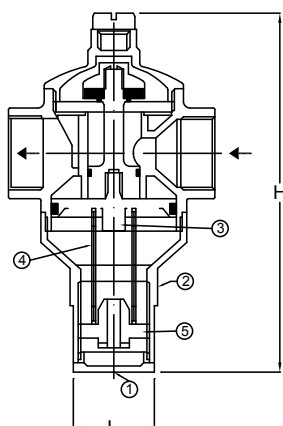

- Please name the model No. (PR-304S) when negotiation.
- Thread: BS21, ANSI B2.1.
- Max. Temperature: 220°C
- Test Pressure: Body 25kgf/cm<sup>2</sup> (Hydrostatic)
- Outlet Primary Pressure: 0.5 kgf/cm<sup>2</sup> - 5 kgf/cm<sup>2</sup>
- Inlet P.: 16 kgf/cm<sup>2</sup> - Outlet P.: 3.5 kgf/cm<sup>2</sup> (water)

**Material**

<b>Model</b>	<b>PR-304S</b>
<b>Body</b>	SUS304
<b>Bonnet</b>	SUS304 or SUS303
<b>Piston</b>	SUS304
<b>Stem</b>	SUS304 or SUS303
<b>Seat</b>	SUS304
<b>Disc</b>	VITON
<b>Spring</b>	SUS304
<b>Spring Holder</b>	SUS304
<b>Bottom Cover</b>	ABS
<b>O-Ring</b>	VITON

**Dimension**

Size	mm						
	inch	1/2	3/4	1	1.1/4	1.1/2	2
	mm	15	20	25	32	40	50
<b>L</b>		65	65	85	93	93	93
<b>H</b>		113	113	164	164	165	167