

## Specifications

For other materials or modifications, please consult TESCO. M.

### OPERATING PARAMETERS

Pressure rating per criteria of ANSI/ASME B31.3

#### Maximum Inlet Pressure

400 or 3500 psig / 27.6 or 241 bar

#### Outlet Pressure Ranges

0-12, 0-25, 0-50, 0-100, 0-150,  
0-250 psig (400 psig inlet models only)  
0-0.83, 0-1.7, 0-3.4, 0-6.9, 0-10.3,  
0-17.2 bar (27.6 bar inlet models only)

#### Design Proof Pressure

150% of maximum rated

#### Leakage

**Internal:** Bubble-tight

**External:** Design to meet  $\leq 2 \times 10^{-8}$  atm cc/sec He

#### Operating Temperature

-40°F to 165°F / -40°C to 74°C

#### Flow Capacity

**3500 psig / 241 bar Inlet:**  $C_v = 0.06$

**400 psig / 27.6 bar Inlet:**  $C_v = 0.15$

### MEDIA CONTACT MATERIALS

#### Body

316 Stainless Steel

#### Bonnet

303 Stainless Steel

#### Diaphragm

316 Stainless Steel

#### Seat

PTFE

#### Friction Sleeve (inner)

PTFE

#### Remaining Parts

316 Stainless Steel

### OTHER

#### Cleaning

CGA 4.1 AND ASTM G93

#### Weight

3 lbs / 1.4 kg

Teflon® is a registered trademark of E.I. du Pont de Nemours and Company.



TESCOM 44-2600 Series is a compact, extremely sensitive, high purity single-stage regulator for specialty, flammable and industrial gases with flows of less than 10 SCFM / 283 SLPM. Diffusion-resistant metal diaphragm seal ensures gas purity and integrity.

### Applications




- Gas/Analyzer sampling systems
- Fuel cells
- Tissue and cell culture incubators
- Chromatograph flame detector fuel supply
- Excellent for low outlet and low differential pressure applications

### Features and Benefits

- Features a large convoluted diaphragm for extreme sensitivity with minimum droop
- Repeatability:  $\pm 0.5\%$  of outlet pressure range
- Metal-to-metal diaphragm to body seal
- Accuracy:  $\pm 1\%$  of outlet pressure range
- Gauge ports are standard
- Dome loaded version is available
- $C_v = 0.02$  and  $C_v = 0.24$  models are available
- NACE compliant designs are available

# 44-2600 SERIES

## 44-2600 Series Regulator Drawing

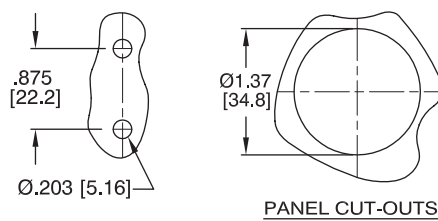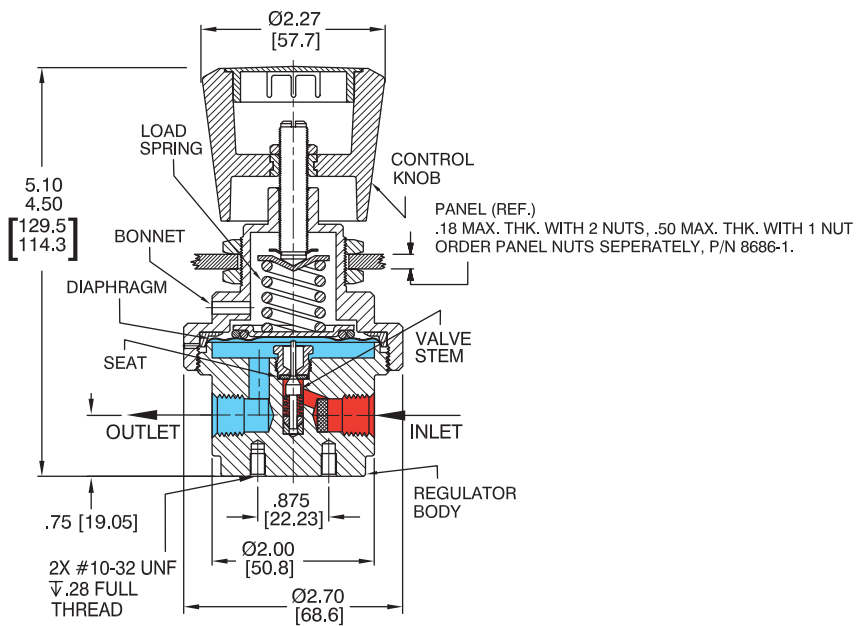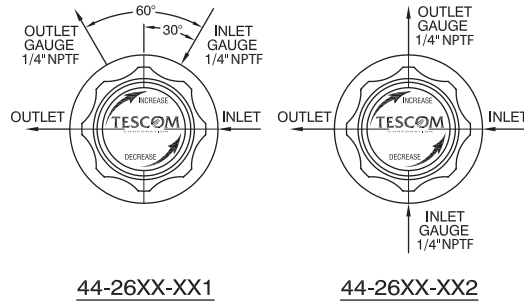

All dimensions are reference & nominal  
 Metric [millimeter] equivalents are in brackets

44-2600 Series Regulator Flow Charts

For more information on how to read flow curves, please refer to the Flow Curves and Calculations document (debul2007x012) in the TESCOM catalog or on www.tescom.com.

